



4 PLAIN WIRE - TYPICAL

WIRE SPACING TO SUIT BOTH TIMBER AND STEEL POSTS

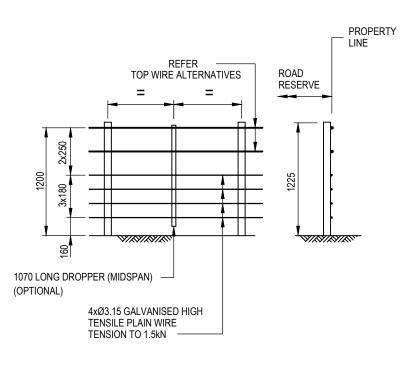

4 PLAIN WIRE & 2 TOP WIRE - TYPICAL

WIRE SPACING TO SUIT TIMBER POSTS ONLY

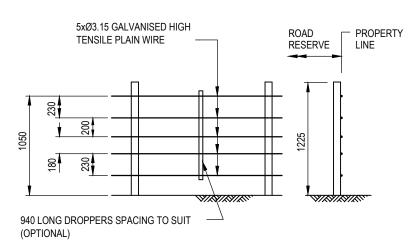

5 PLAIN WIRE - TYPICAL


WIRE SPACING TO SUIT BOTH TIMBER AND STEEL POSTS

TOP WIRE ALTERNATIVES

1xØ2.50 GALVANISED HIGH TENSILE PLAIN 2xØ1.80 GALVANISED HIGH TENSILE BARBED 2xØ4.0 WHITE PVC COATED "HORSE SIGHTER WIRE" HIGH TENSILE PLAIN WIRE



l	REFERENCE DRAWINGS		
I	AGRICULTURAL FENCING DETAILS	200331-0096	
l	TIMBER STRAINER AND POST DETAILS	200331-0101	
l	STEEL PIPE STRAINER AND POST DETAILS	200331-0102	
l	STEEL ANGLE STRAINER AND POST DETAILS	200331-0103	

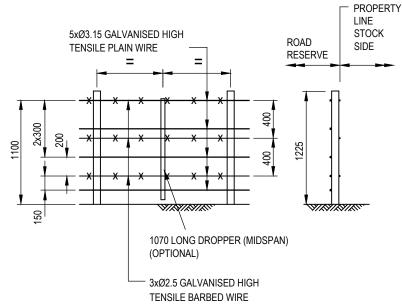

5 PLAIN & 3 BARBED WIRE - TYPICAL

WIRE SPACING TO SUIT TIMBER POSTS ONLY

NOTES

- FENCING TO BE SUPPLIED AND INSTALLED IN ACCORDANCE WITH AUSTRALIAN STANDARD AS 1725 AND MAIN ROADS SPECIFICATION 903 FENCING.
- DIMENSIONS SHOWN ON THIS DRAWING ARE TYPICAL
- BARBED AND PLAIN WIRES TO BE SECURED BY PREFORMED CLIPS OR WIRE TIES AT EACH
- ON STRAINERS EACH LINE WIRE TO BE WRAPPED AROUND THE STRAINER AND TWISTED AROUND ITSELF TO SECURE.
- WIRE SHOULD BE ATTACHED TO THE PROPERTY SIDE OF THE POSTS.
- WIRE TO BE TENSIONED TO MANUFACTURER'S SPECIFICATIONS.
- GALVANISED WIRE TO BE IN ACCORDANCE WITH AUSTRALIAN STANDARD AS 4534.
- GALVANISED STEEL PICKETS TO BE IN ACCORDANCE WITH AUSTRALIAN STANDARD AS 4680.
- TIMBER POSTS TO BE TREATED TO H4 IN ACCORDANCE WITH AUSTRALIAN STANDARD AS
- 12. ALL WIRES TO BE JOINED BY FIGURE OF 8 KNOT OR WIRE JOINERS AS PER INDUSTRY STANDARD.
- 13. ALL UNITS ARE IN MILLIMETRES UNLESS OTHERWISE NOTED.



mainroads PLANNING AND TECHNICAL SERVICES DIRECTORATE

ROAD AND TRAFFIC ENGINEERING BRANCH EAST PERTH 6004 Telephone 138 138

DRAWN	RTE BRANCH	
DESIGNED	M. VASEV	14.06.05
VERIFIED	J. KARPINSKI	14.06.05
APPROVED	W. CANNELL	15.06.05
FILE NO.	13/4330	

STANDARD DRAWING 1200 AGRICULTURAL FENCING DETAILS PLAIN FENCEWIRE DETAILS

200331-0098-1

TITLE BLOCK & FILE No. UPDATED A.Wong 26/10/23

AMENDMENTS