



STOP LINE



GIVE WAY LINE

600 600 600 600 600  
LINE WIDTH VARIES

ROAD FEATURE	LINE WIDTH mm	LOCATION
PATHWAYS	200	REFER TO DRAWING 200531-0009
UNSIGNALISED INTERSECTION	300	AS BELOW
SIGNALISED INTERSECTION	450	
RAILWAY CROSSING	450	REFER TO DRAWING 200431-0001
APPROACH SPEED > 80km/h	600	AS SPECIFIED (eg: HIGH CRASH INTERSECTIONS, LIMITED APPROACH SIGHT DISTANCE, LOW COMPLIANCE etc.)


AMENDMENTS		
No.	DESCRIPTION	APPROVED & DATE
5	NOTE 6 ADDED.	R.K. 15/04/2021
6	TITLE BLOCK AND FILE No. UPDATED. NOTE 6 ADDED.	C. M. 03/03/2026

- NOTES
1. THE ROAD SURFACE IN THE VICINITY OF THE STOP OR GIVE WAY LINE SHALL NOT BE CONSTRUCTED FROM BRICK PAVING SINCE THIS HAS POOR ADHESION FOR ROAD MARKINGS AND SHOULD BE CONSTRUCTED WITH A CONTRASTING COLOUR TO THE WHOLE PAVEMENT MARKING E.G. ASPHALT.
  2. CONCRETE FLUSH BEAMS DO NOT PROVIDE ADEQUATE CONTRAST FOR THE WHITE PAVEMENT MARKING.
  3. FOR DIMENSIONS AND USAGE OF LINE TYPES REFER TO DRAWING 9931-0198.
  4. FOR RETROREFLECTIVE RAISED PAVEMENT MARKERS (RRPMs), REFER TO DRAWINGS 201031-0026 AND 201031-0027.
  5. THIS LINE SHALL BE MARKED WHEREVER THE SEALED PAVEMENT WIDTH OR WIDTH BETWEEN KERBS IS AT LEAST 6m FOR THE LENGTH OF THE LINE.
  6. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.




NEW INSTALLATION


AT TRAFFIC ISLAND

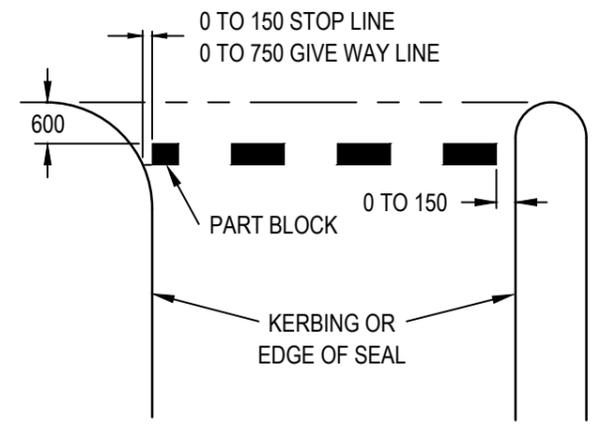


AT UNBROKEN SEPARATION LINES OR DOUBLE TWO WAY BARRIER LINES

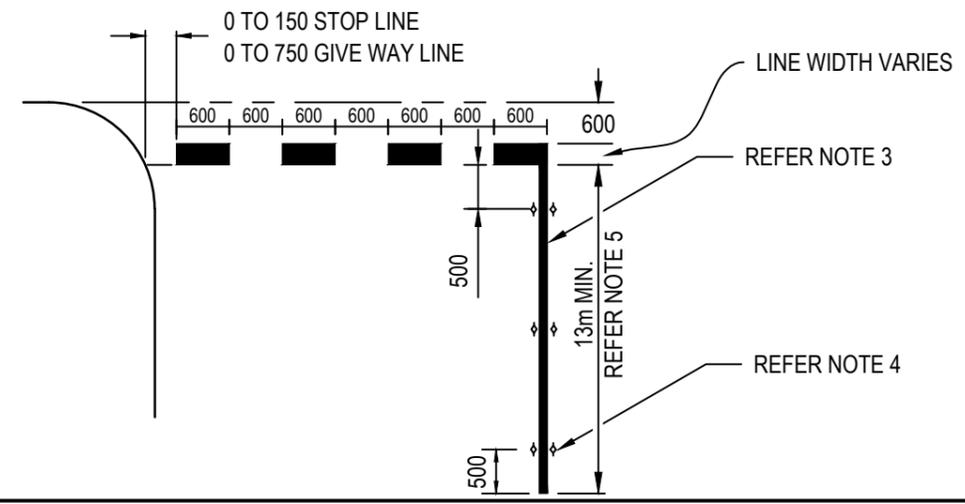

WIDENING MODIFICATIONS

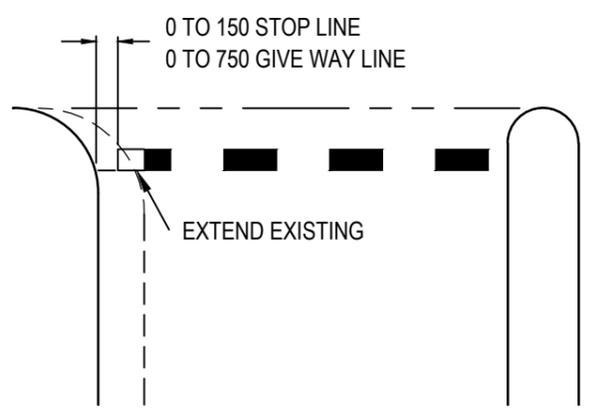

INSTALLATION OF ISLAND

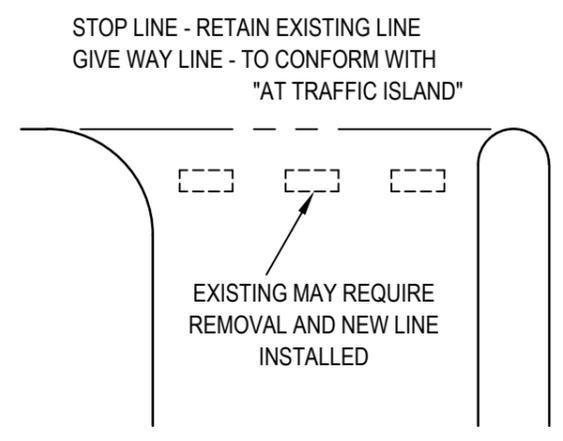

**mainroads**  
WESTERN AUSTRALIA

PLANNING AND TECHNICAL SERVICES DIRECTORATE  
ROAD AND TRAFFIC ENGINEERING BRANCH  
Waterloo Crescent EAST PERTH 6004  
Telephone 138 138

DRAWN	D. LANDMARK	16.01.04
DESIGNED	D. LANDMARK	16.01.04
VERIFIED	D. SULLIVAN	2.07.04
APPROVED	R. GROVE	2.07.04
FILE NO.	13/4330	

STANDARD DRAWING  
PAVEMENT MARKING  
STOP AND GIVE WAY LINES

MRWA DRAWING NUMBER  
200431-0002-6  
AMENDMENT

NOT TOT SCALE  
A  
3