



VERTICAL & LATERAL CLEARANCES

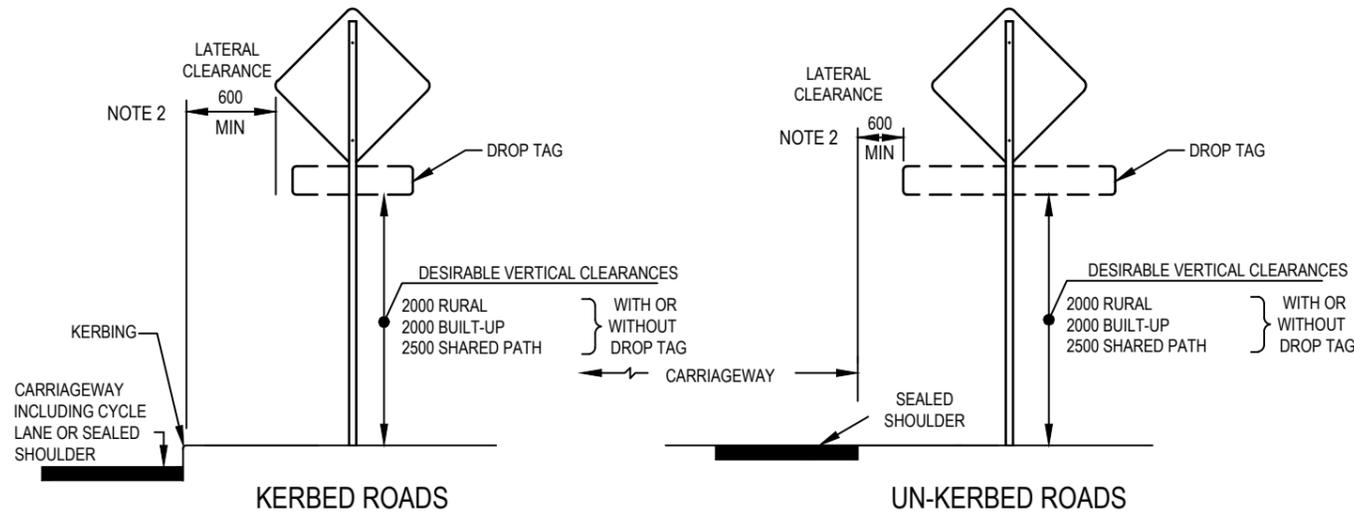

SIGNS PERPENDICULAR TO ROAD

- EXCEPTIONS :**
- TO OVERCOME ANY VISIBILITY CONSTRAINTS DUE TO ROADSIDE OBSTRUCTIONS (TREES, POLES ETC.) AND WHERE PEDESTRIAN/CYCLIST VERTICAL CLEARANCES ARE NOT APPLICABLE, WITH PRIOR APPROVAL OF MRWA THE CLEARANCES MAY BE REDUCED TO:
 - LATERAL CLEARANCE 300mm MIN.
 - VERTICAL CLEARANCE 1500mm MIN.
 - STREET NAME BLADES MAY BE INSTALLED ON LIGHT POLES AND HAVE THE SAME LATERAL CLEARANCES AS SIGNS INSTALLED PERPENDICULAR OR PARALLEL TO THE ROAD. DESIRABLE VERTICAL CLEARANCES ARE AS FOLLOWS:
 - 2000 RURAL.
 - 2500 BUILT UP WITH A MAXIMUM OF 3000.


FOOTING DETAILS

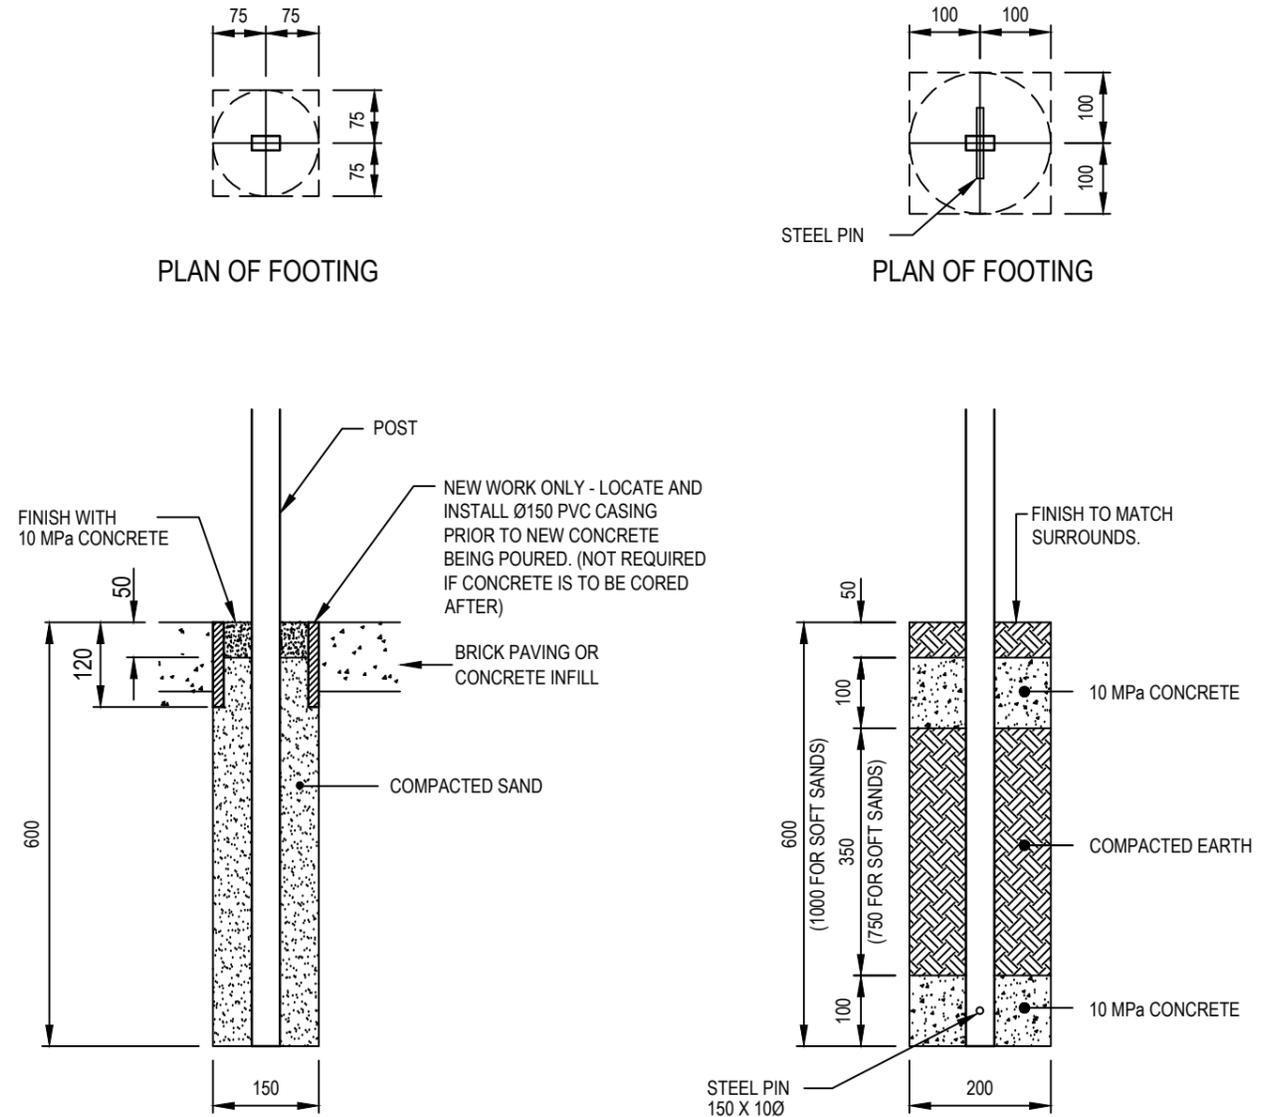


CROSS SECTION OF FOOTING (TRAFFIC ISLAND, FOOTPATH OR OTHER PAVED/SURFACED AREA)

NEW INSTALLATION & REPLACEMENT OF EXISTING SIGNS

CROSS SECTION OF FOOTING (GENERAL/VERGE)

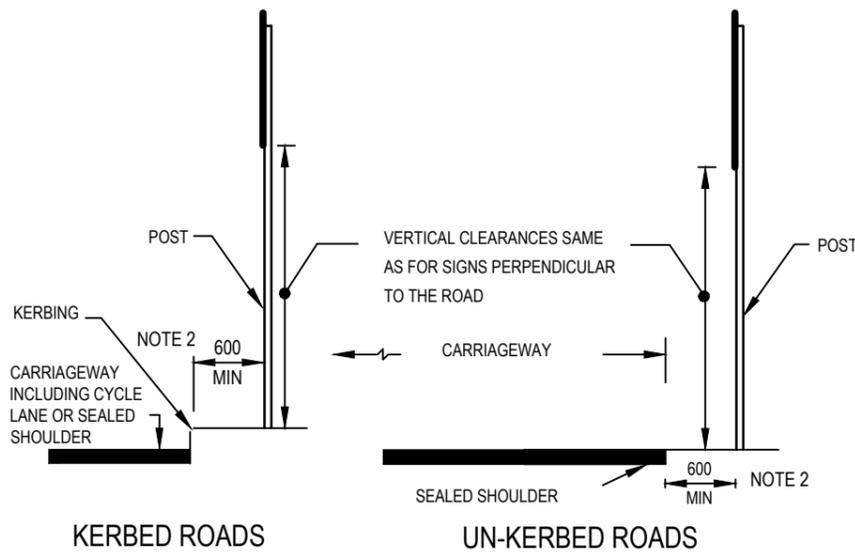

SIGNS PARALLEL TO ROAD

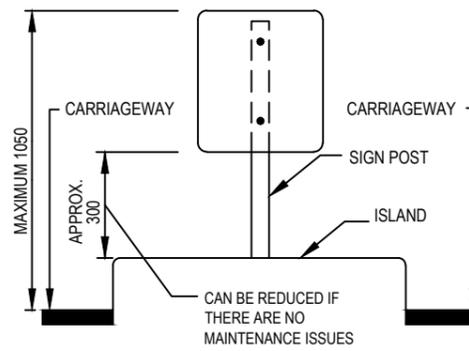

SMALL SIGNS LOCATED ON ISLANDS

- NOTES:**
- ALL DIMENSIONS IN MILLIMETRES (mm) UNLESS STATED OTHERWISE.
 - LATERAL CLEARANCE MAY BE INCREASED TO 5000mm ON ROADS USED FOR HIGH WIDE LOADS PROVIDED THE SIGN IS CLEARLY VISIBLE FOR DRIVERS AND THE RETROREFLECTIVE SHEETING USED IS CLASS 1X.

| | | |
|------------|---|--------------------------|
| 14 | TITLE BLOCK AND FILE No. UPDATED, REFERENCE TO UNSEALED SHOULDERS REMOVED. NOTE 1. AMENDED. | C. MAGRIPLIS 03/03/2026 |
| 13 | NOTE RELATING TO VERTICAL CLEARANCE OF SMALL SIGNS ADDED. | R. KOORENGEVEL 7/05/2015 |
| No. | DESCRIPTION | APPROVED & DATE |
| AMENDMENTS | | |

mainroads
WESTERN AUSTRALIA

PLANNING AND TECHNICAL SERVICES DIRECTORATE
ROAD AND TRAFFIC ENGINEERING BRANCH

Waterloo Crescent
Telephone 138 138

EAST PERTH 6004

| | |
|----------|--------------------|
| DRAWN | N.ESHETE JUNE 95 |
| DESIGNED | N.ESHETE JUNE 95 |
| VERIFIED | V. MORO 26.6.95 |
| APPROVED | R.J VEITCH 26.6.95 |
| FILE NO. | 13/4330 |

STANDARD DRAWING
LOCATION DETAILS
FOR ONE POST SIGNS
GENERAL

MRWA DRAWING NUMBER **9548-0106-14** AMENDMENT

NOT TO SCALE