


AMENDMENTS

No.	DESCRIPTION	APPROVED & DATE
4	REFERENCE TO RED ASPHALT REMOVED. DIMENSION AMENDED.	C.M. 16/08/2018
5	TITLE BLOCK AND FILE No. UPDATED. NOTE 4. ADDED.	C. M. 03/03/2026


NOTES

1. A MINIMUM 30% LUMINANCE CONTRAST BETWEEN THE COLOUR OF THE PATH AND THE COLOUR OF THE TGSIs MUST BE ACHIEVED.
2. THE NARROW MEDIAN GAP DETAIL SHOULD NOT BE USED AT SIGNALISED INTERSECTIONS (AT LEAST WHERE A PARALLEL WALK PHASE EXISTS).
3. TGSIs CAN BE EITHER 300 x 300mm OR 400 x 400mm IN SIZE. (400 x 400mm TILES SHOWN).
4. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS STATED OTHERWISE.

5

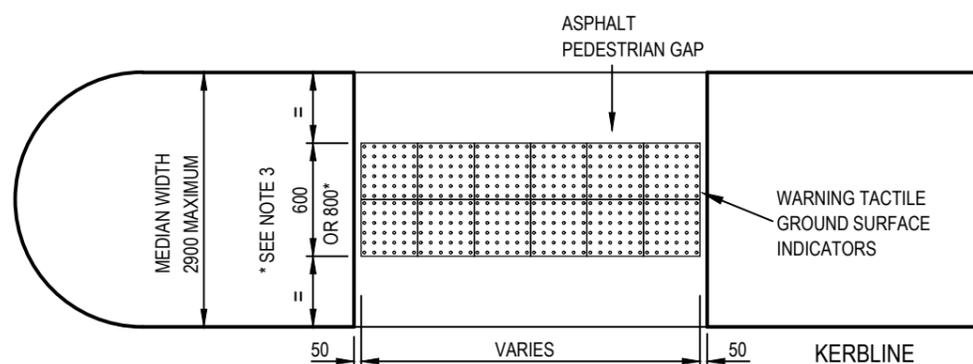

NARROW MEDIAN GAP DETAIL
 MEDIAN WIDTH ≤ 2900
 (SEE NOTE 2)

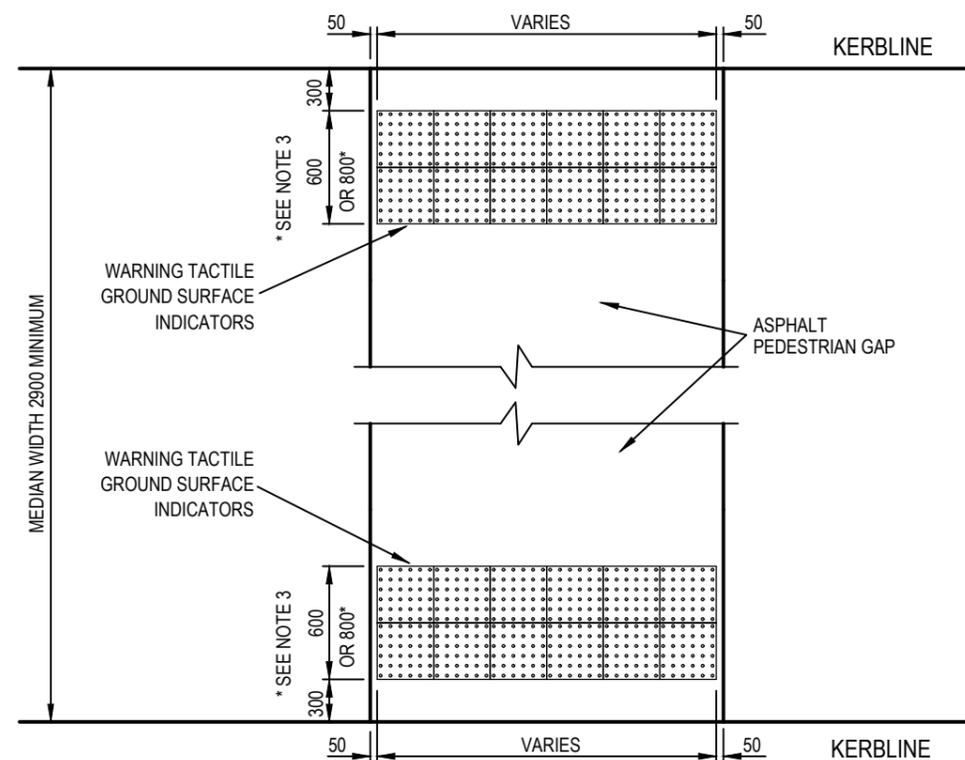

WIDE MEDIAN GAP DETAIL
 MEDIAN WIDTH > 2900

5

PLANNING AND TECHNICAL SERVICES DIRECTORATE ROAD AND TRAFFIC ENGINEERING BRANCH Waterloo Crescent EAST PERTH 6004 Telephone 138 138	
DRAWN	C. MAGRIPLIS APRIL 09
DESIGNED	C. MAGRIPLIS APRIL 09
VERIFIED	C. MAGRIPLIS 07/01/10
APPROVED	R. GROVE 07/01/10
FILE NO.	13/4330

STANDARD DRAWING
 TACTILE GROUND SURFACE INDICATORS
 MEDIAN GAP DETAILS

MRWA DRAWING NUMBER AMENDMENT

200931-0091-5

SCALES 1:50 0 0.25m 0.5 0.75 1.0 1.25 1.5 1.75 2.0 2.25 2.5 2.75 3.0 3.25 3.5 3.75